


NOTES; (unless otherwise specified in the plans or special provisions)


- 1. All trees shall be a minimum of 15-gallon size and of the variety indicated on the plans or specified by the City Engineer.
- 2. Each tree shall be approved by the Engineer prior to planting. Contractor
- may request Engineer to pre-approve tree at local nursery.
- 3. The exact location of each tree shall be approved by the Engineer prior to planting.
- Vertically cut the root ball at three or four places to loosen roots and discourage circling. Vertically scarify sides and bottom of planting hole.
- 5. When planting, hold tree so that previous planting level is even with sidewalk level and gradually place top soil about the root ball.


1:1 ratio with the native soil removed from the planting hole.


- 6. Top soil fill shall be an approved garden mix loam that is mixed at a
- 7. When hole is three-quarters full, fill with water to compact the soil and eliminate air pockets.
- 8. Fill planting hole with loose soil to ground level.
- 9. Construct a watering basin around each tree as shown.
- 10. Planting operations must be followed by a deep, thorough watering of each tree.
- 11. Substitutions in tree varieties are permitted only upon writter authorization from the City Engineer.
- 12. All street trees installed in commercial and industrial shall be installed with an irrigation system (fed from on-site).

				(104 110111 01			
REVISED DATE: JANUARY 2008	STREE	T TRE	E I	PLANTING	NOTES		
DRAWN BYCHECKED I APPROVED	BY	CITY	OF	CAMPBEL	L	DETAIL	13

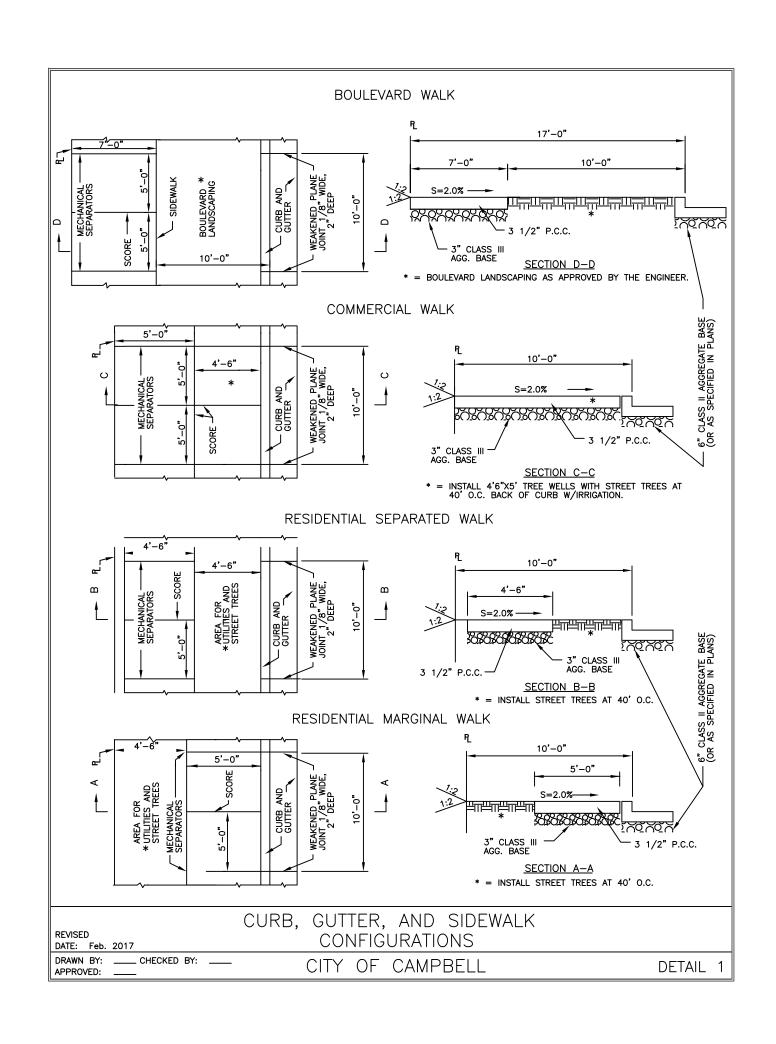

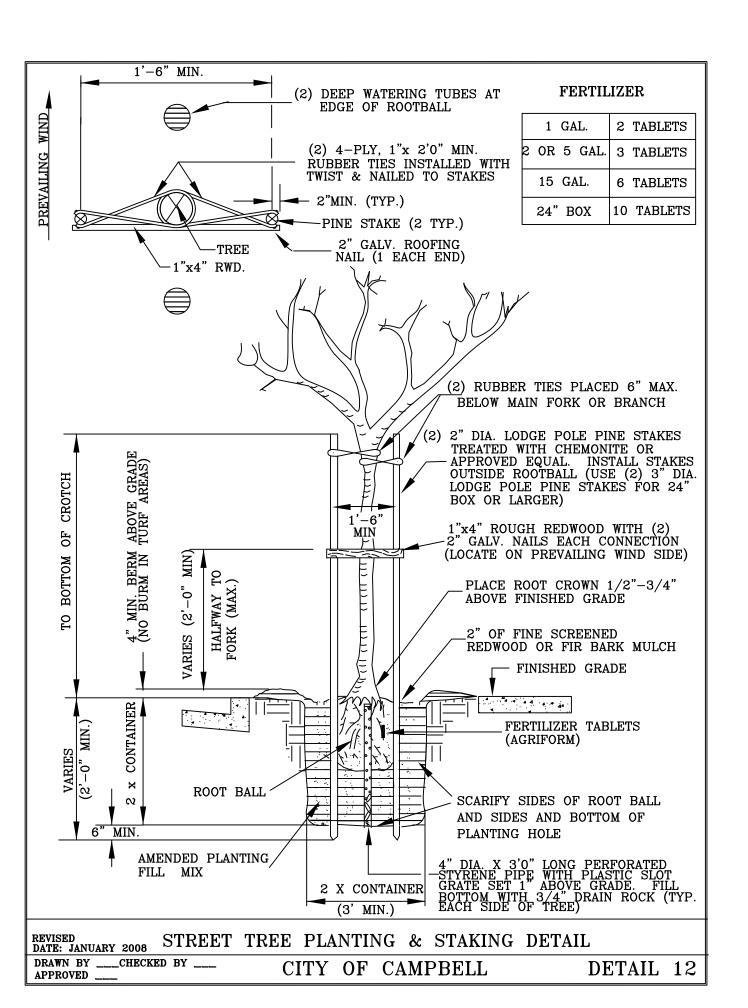

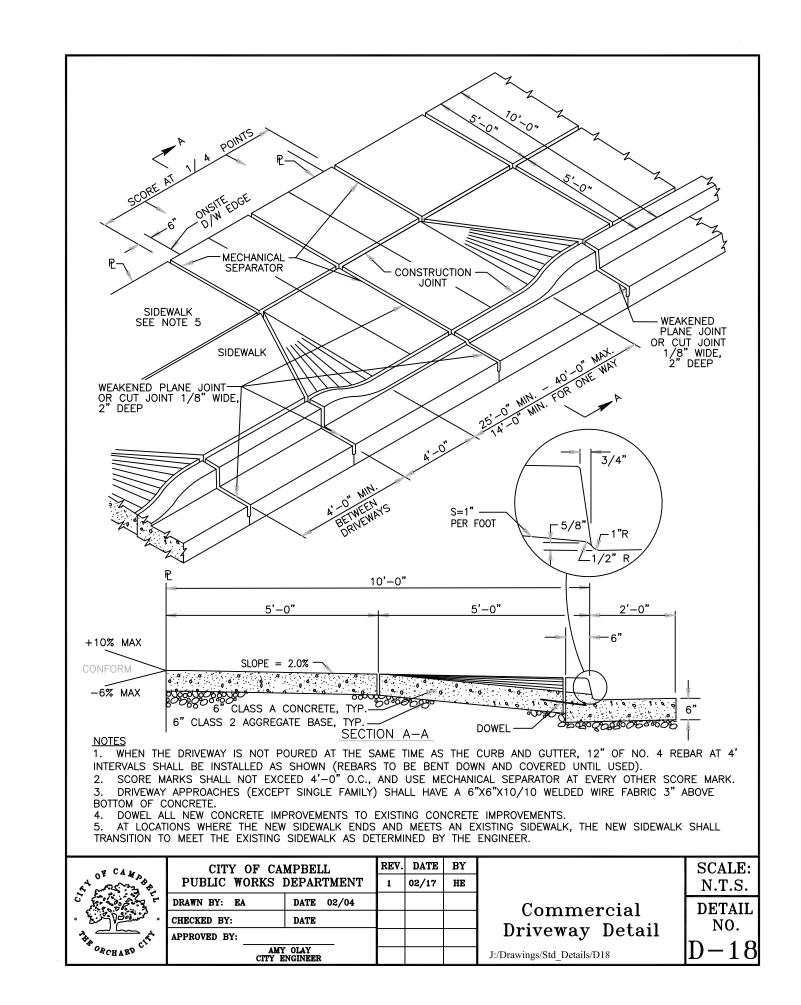

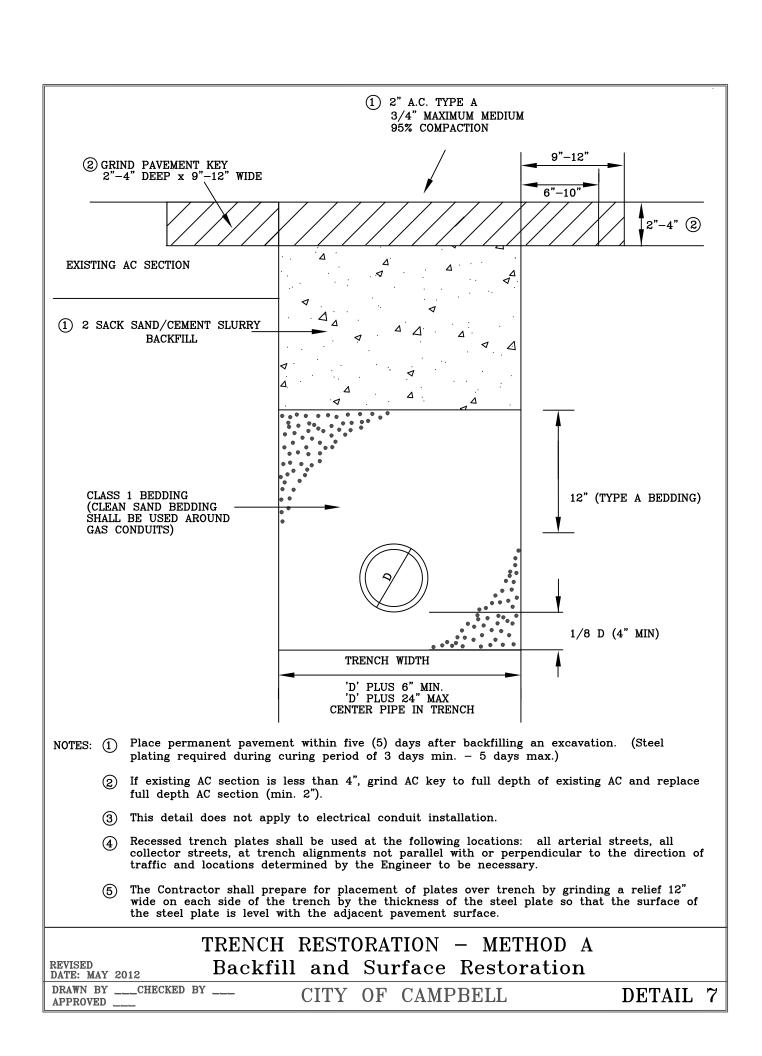



CITY STANDARD DETAILS
'F-SITE STREET IMPROVEMENT
PROJECT ADDRESS
CROACHMENT PERMIT NO.

OFF

00

SCALE:

SHEET: XX OF XX